

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		200Ah
Dimension	Length	509 ± 3mm(20.04inches)
	Width	264 ± 3mm(10.4inches)
	Container Height	217 ± 3mm(8.54inches)
	Total Height(with Terminal)	237 ± 3mm(9.33inches)
Weight With Acid		Approx 48Kg
Acid		1.280 ± 0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		4
Hold-Down		B0
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)




Electrical Specification

Rated Capacity	20 hour rate(4.90A)	200Ah
Reserve Capacity (25A@10.5V)		360min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		1276A(JIS)


Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 [°] _{±0.3}	17.9 [°] _{±0.3}


Dimensions (mm)

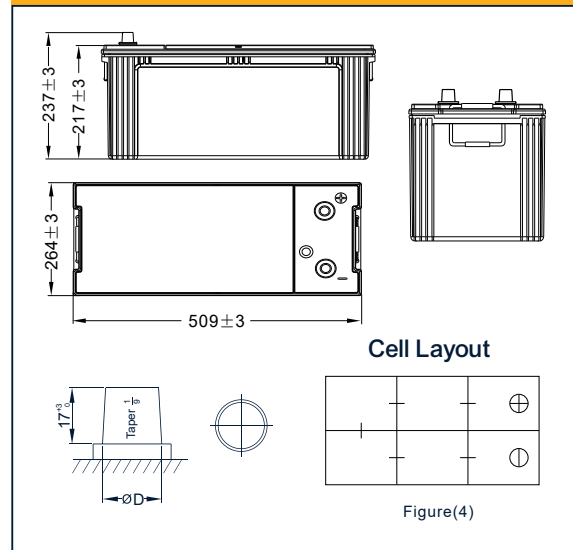

Discharge Characteristics

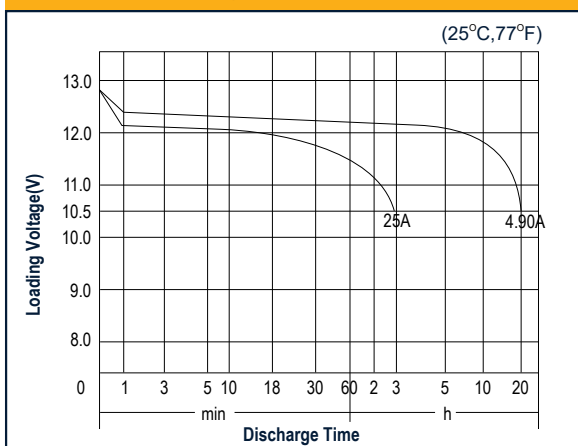

Discharge Characteristics

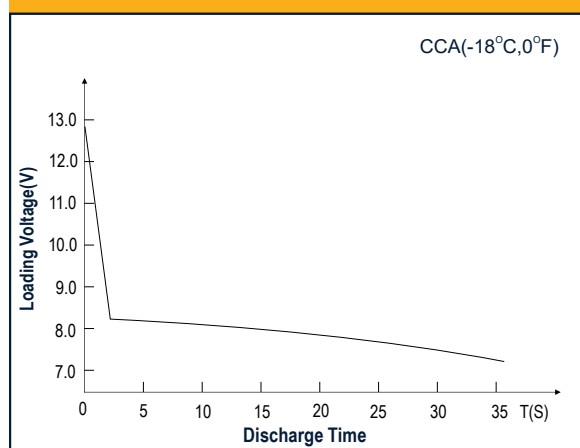

Made in Malaysia