

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		66Ah
Dimension	Length	278 ± 3mm(10.94inches)
	Width	175 ± 3mm(6.85inches)
	Container Height	190 ± 3mm(7.48inches)
	Total Height(with Terminal)	190 ± 3mm(7.48inches)
Weight With Acid		(Approx 15.6Kg)
Acid		1.280 ± 0.015g/cm ³ (25° C)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)




Electrical Specification

Rated Capacity	20 hour rate(3.3A)	66Ah
Reserve Capacity (25A@10.5V)		118min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		684A(EN)


Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 [°] _{±0.3}	17.9 [°] _{±0.3}


Dimensions (mm)

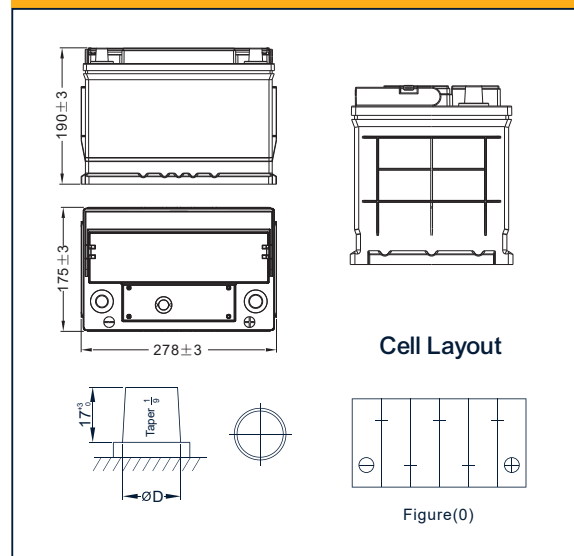

Discharge Characteristics

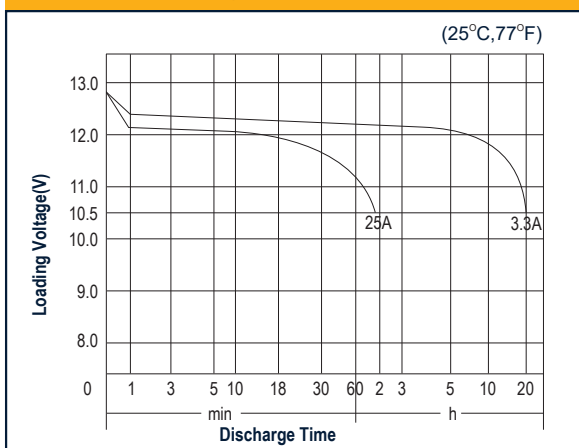

Discharge Characteristics

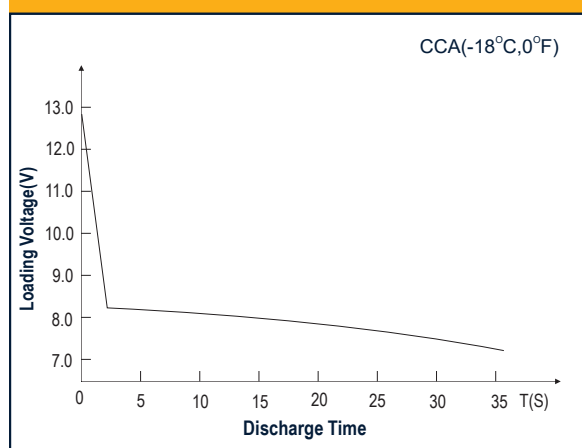

Made in Malaysia