



### Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		75Ah
Dimension	Length	259 ± 3mm(10.2inches)
	Width	172 ± 3mm(6.85inches)
	Container Height	202 ± 3mm(7.95inches)
	Total Height(with Terminal)	222 ± 3mm(8.74inches)
Weight With Acid		Approx 18.2Kg(40.1lbs)
Acid		1.280 ± 0.015g/cm <sup>3</sup> (25° C)
Standard Terminal		1
Cell layout		0
Hold-Down		B1
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)


### Electrical Specification

Rated Capacity	20 hour rate(3.5A)	70Ah
Reserve Capacity (RC)25A@10.5V		113min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		702A(JIS)


### Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 <sup>°</sup> <sub>±0.3</sub>	17.9 <sup>°</sup> <sub>±0.3</sub>


### Dimensions (mm)

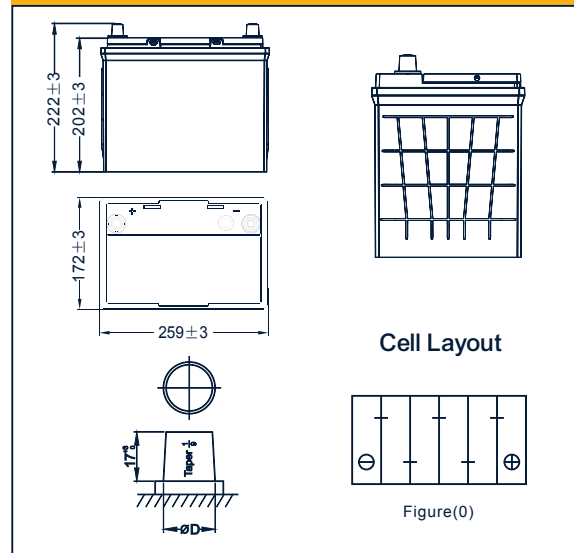

### Discharge Characteristics

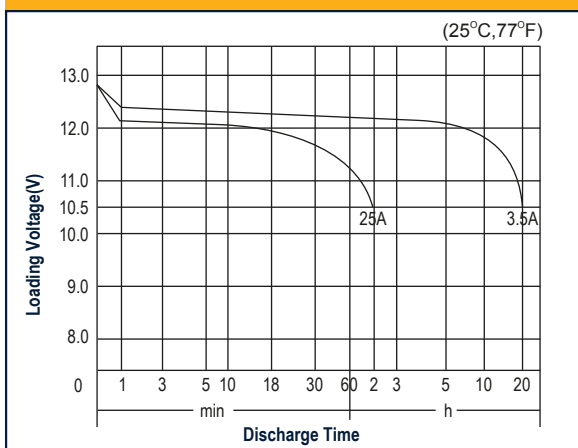

### Discharge Characteristics

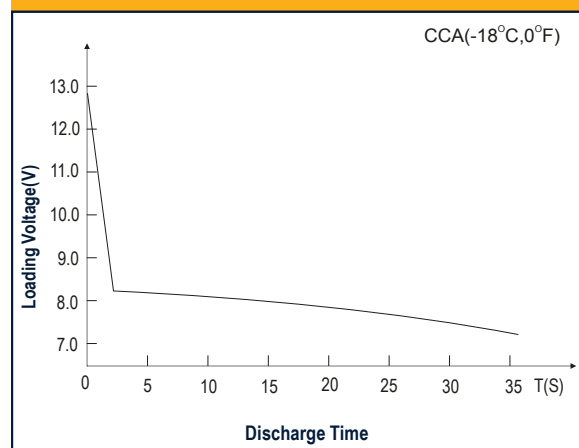

Made in Malaysia