

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		100Ah
Dimension	Length	331 ± 3mm(13.03inches)
	Width	173 ± 3mm(6.81inches)
	Container Height	220 ± 3mm(8.66inches)
	Total Height(with Terminal)	238 ± 3mm(9.37inches)
Weight With Acid		Approx 25.0Kg(55.1lbs)
Acid		1.280 ± 0.015g/cm ³ (25°C)
Standard Terminal		A
Cell layout		18
Hold-Down		B0
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)




Electrical Specification

Rated Capacity	20 hour rate(3.5A)	100Ah
Reserve Capacity (RC)25A@10.5V		182min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		1000A


Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
A	19.5 ^{±0.3}	17.9 ^{±0.3}


Dimensions (mm)

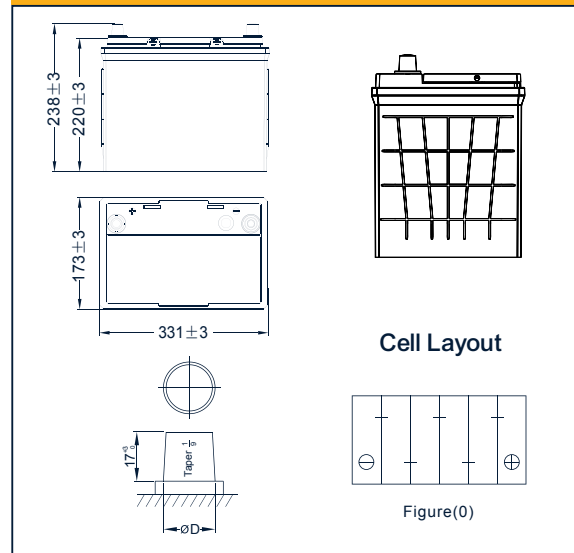

Discharge Characteristics

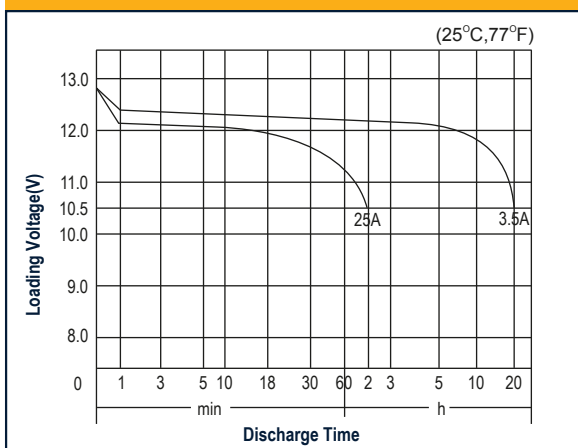

Discharge Characteristics

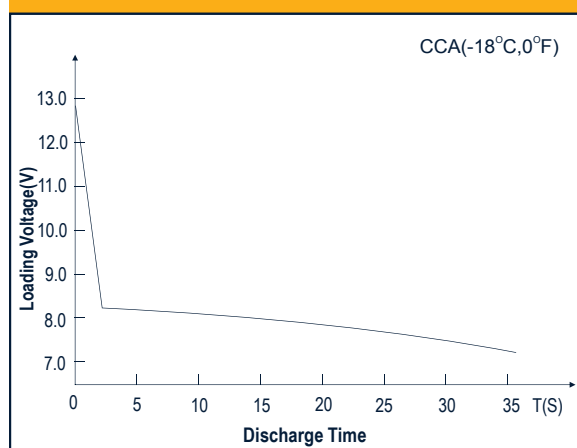

Made in Malaysia