


ML 200-25.6

Lithium Battery

1. Grade A new EVE cells
2. LiFePO₄ cell life cycle could reach 6000 times at 80% DOD and 70%EOL@25°C.
3. High charge /discharge current, Up to 150A.
4. The system adopts a high-performance BMS battery management module. The BMS has the protection function in current, voltage, and temperature, it also makes good communication between the battery system and the host equipment.
5. All intelligent designs, equipped with a centralized monitoring module, realize computer management that can communicate with the remote central control center.
6. Supports Bluetooth and APP functions.
7. Up to 16 batteries can be connected in parallel.
8. 5-year Warranty.

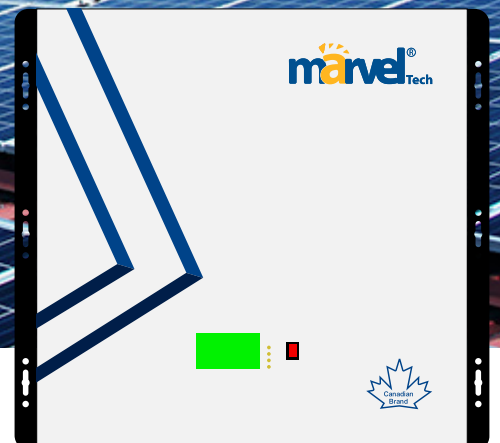

Battery System Specifications

Battery System

Nominal voltage (V)	25.6
Rated Capacity (Ah)	200
Voltage range (V)	22~28.8
overcharge protects the cell voltage(V)	3.55/3.6
over-discharge protects cell voltage(V)	3.0/2.75
Rated Energy (kWh)	5.12
Battery type	LFP
Cell type	EVE-100LA
Group approach	8S2P
Rated charging current (A)	150
Maximum charging current (A)	160@8s
Charging operating temperature (°C)	0~50°C
Rated discharge current (A)	150
Maximum discharge current (A)	160@8s
Discharge operating temperature (°C)	-20~55°C
Battery net weight(KG)	45
Battery size (L×W×H:mm)	570*523*164±2
Package Method	carton+woodencase
Cycle @RT/70%EOL,0.5C/0.5C	6000
Communication protocols	RS485 /CAN
Bluetooth function/LCD display	YES
Parallel function	YES

Match the inverter

GoodWe, Growatt, SMA, Sungrow, Crestec,
Shouhang, Deye, Jinlang, Sanjing, INVT,
Riyueyuan, Shuori, Meixerox, etc.
support the Peneng agreement