

Motorcycle Battery

YTX12A-BS


General Features

- ▶ Maintenance-free design
- ▶ Sealing structure of ABS materials
- ▶ Low self-discharge
- ▶ High CCA and good starting performance



Specifications

Nominal Voltage	Nominal Capacity (10HR)	Dimension			Weight $\pm 2\%$	Internal Resistance (m Ω)	CCA		Standard Terminals
		L	W	H			(-18°C)	(25°C)	
12V	13.0AH	150 \pm 2mm	85 \pm 2mm	131 \pm 2mm	Approx 3.70kg (8.16lbs)	17.0	140	195	Q56

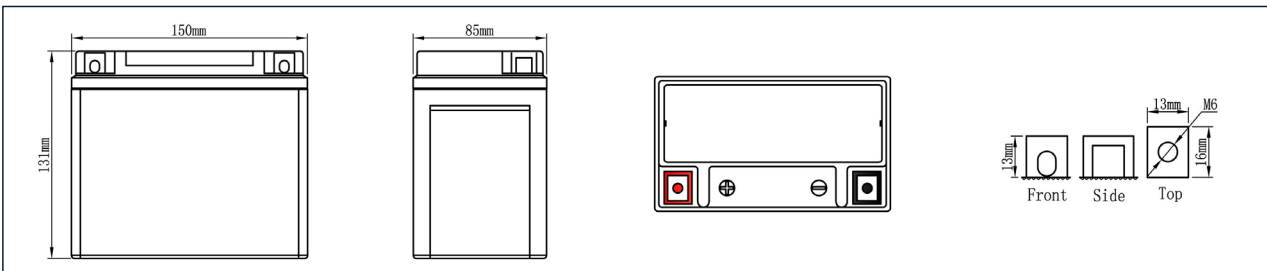

Charging Methods

Capacity Affected By Temperature	
40°C (104°F)	103%
25°C (77°F)	100%
0°C (32°F)	86%

Charging Methods	
Constant-Current Charge	Charging current: 0.1C, when charging voltage up to 14.4V, continue to charge 4h.
Floating Charge	Charging current less than 0.25C Voltage: 13.60V~ 13.80V @ 25°C (77°F)

Performance Characteristics

