

Motorcycle Battery

YTX30L-BS


General Features

- ▶ Maintenance-free design
- ▶ Sealing structure of ABS materials
- ▶ Low self-discharge
- ▶ High CCA and good starting performance



Specifications

| Nominal Voltage | Nominal Capacity (10HR) | Dimension | | | Weight $\pm 2\%$ | Internal Resistance (m Ω) | CCA | | Standard Terminals |
|-----------------|-------------------------|---------------|---------------|---------------|--------------------------|-----------------------------------|---------|--------|--------------------|
| | | L | W | H | | | (-18°C) | (25°C) | |
| 12V | 30AH | 166 \pm 2mm | 127 \pm 2mm | 175 \pm 2mm | Approx 9.75kg (21.49lbs) | 8.0 | 290 | 410 | Q58 |

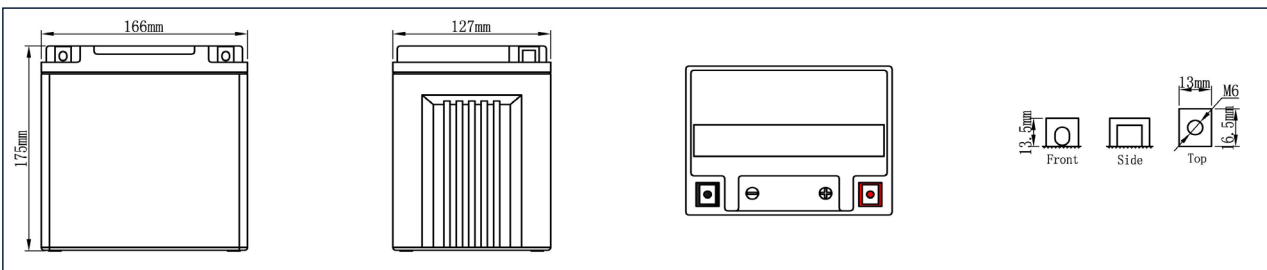

Charging Methods

| Capacity Affected By Temperature | |
|----------------------------------|------|
| 40°C (104°F) | 103% |
| 25°C (77°F) | 100% |
| 0°C (32°F) | 86% |

| Charging Methods | |
|-------------------------|---|
| Constant-Current Charge | Charging current: 0.1C, when charging voltage up to 15.8V, continue to charge 4h. |
| Floating Charge | Charging current less than 0.25C Voltage: 13.60V~ 13.80V @25°C (77°F) |

Performance Characteristics

