

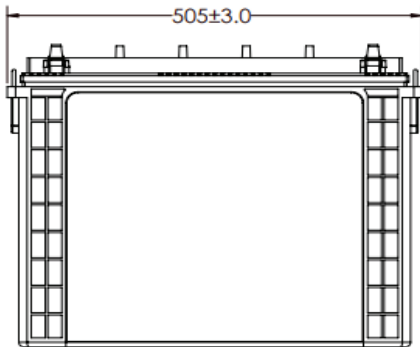


# Tubular Batteries MTU

## MTU-200 Premium

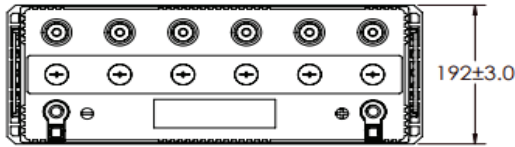

### Product Features: -

1. Robust Tubular with High Pressure die-casted spine- resulting low rate of spine corrosion.
2. Spill Proof Vent plug – resulting in no spillage on top and low controlled acid fumes.
3. Optimized Negative paste receipt for fast charge acceptance
4. Consistent backup throughout life
5. Low Self Discharge
6. Excellent performance on deep cyclic application as compare to AGM VRLA
7. Very High Design & Service Life
8. Low water loss

### Technical Specifications


Model	Nominal Voltage	Rated Capacity 20 Hr @ 27°C (Ah)	Dimensions in mm			Battery Gross Weight [Kg] [±3%]	Terminal Type
			Length (± 3 mm)	Width (± 3 mm)	Height up to terminal (± 3 mm)		
MTU-200 premium	12	200	505	192	410	68.00	L

## Electrical Parameters & Charging Profile


Battery Specified Capacity Test @ 27 °C							
Model	C20 @ 10.5V	C10 @ 10.5V	C7 @ 10.5V	C5 @ 10.5V	C3 @ 10.5V	C1 @ 10.5V	400Watt (33A) @10.5V Backup Time (In Minimum 3Cycles)
MTU-200 premium	200	176	161	146	126	88	4Hrs 45Min.

Ah & Wh Efficiency			
Ah Efficiency	>90%	Wh Efficiency	>75%

**Charging Profile**

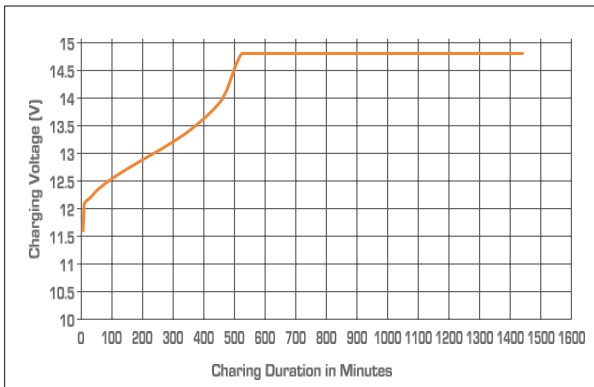


**Self Discharge Characteristics @ Different Temperature**

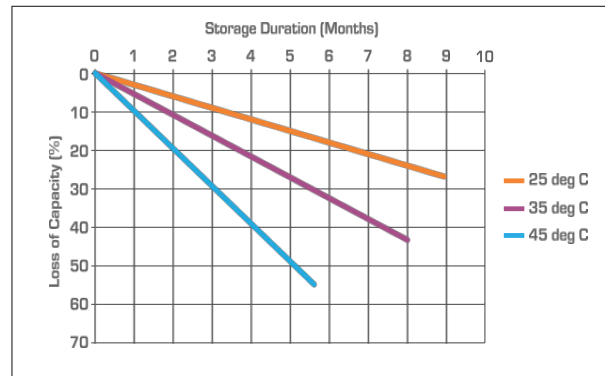


**State of Charge Measure of Open-circuit Voltage @ 27°C**

State of Charge	Specific Gravity	Voltage
100%	1.260	12.7V
75%	1.225	12.4V
50%	1.190	12.1V
25%	1.155	12.0V
0%	1.120	11.8V


**Discharging Characteristics at various rates @ 27°C**

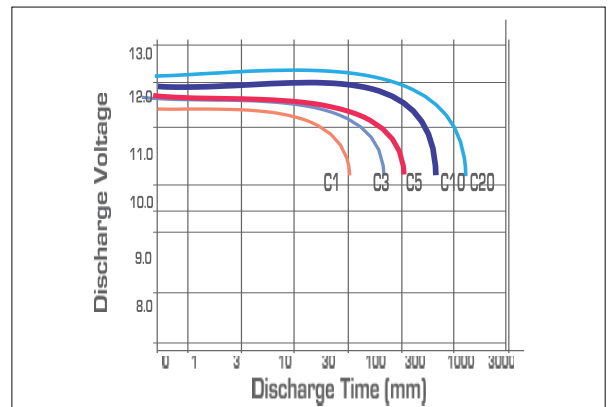

## DOD V/S LIFE CYCLE

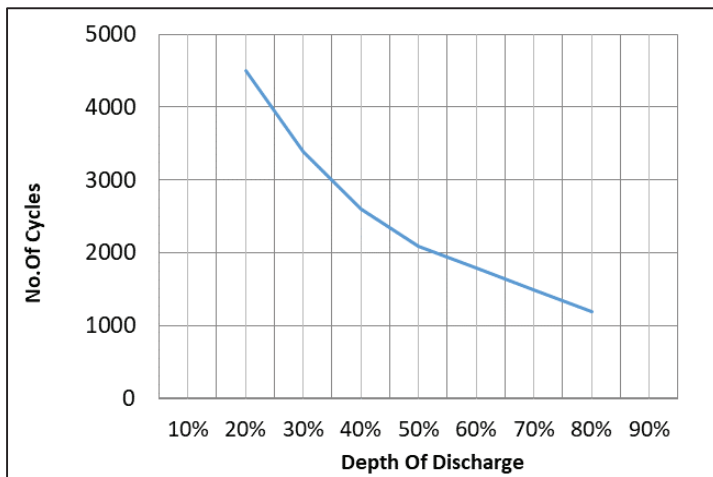

## Expected Capacity Vs Temperature

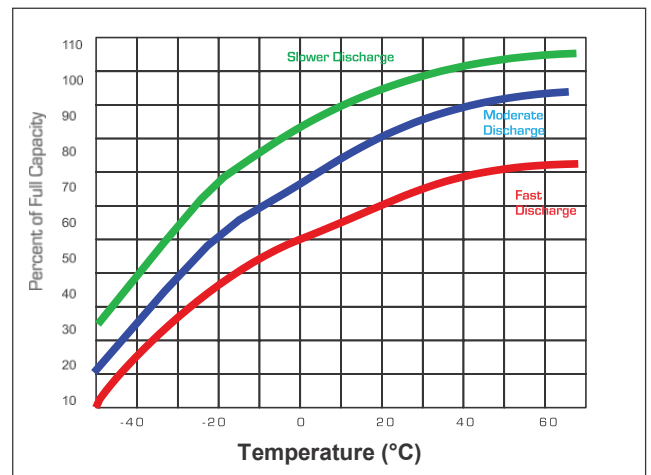



## Charging Instructions

Charger Voltage Settings (at 77° F / 25°C)			
System Voltage	12V	24V	48V
Maximum Charge Current	10% of rated capacity		
Float Voltage	13.6	27.2	54.4
Cyclic Use	14.4	28.8	57.6
Equalization Voltage	15.2	30.4	60.8
Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.			
Periodic Charge	Provide a periodic freshening charge to maintain a SOC greater than the threshold of 70%		

**ISO9000 CERTIFIED**  
Aambitious Assessments Pvt.

ISO 14001  
ENVIRONMENTAL  
MANAGEMENT

  
Aambitious  
Assessments  
Pvt. Ltd.

 [marvel-battery.com](http://marvel-battery.com)  
 [info@marvel-battery.com](mailto:info@marvel-battery.com)

